


# K-707DV

## Alternator tester 7.5 HP.

- 5 Digital meters; 2 voltmeters displays operating voltage & stator output additional voltage reading; 2 ammeters displays operating output amperage and field current; 1 R.P.M. meter
- One 4 ½" diode trio condition meter.
- One 4 ½" ripple voltage meter.
- Bright red indicator light displays ON or OFF mode.
- Selector switch offers 6, 12, 24 or 32 volt operation.
- A and B field circuit.
- Field circuit protection 10 fuse breaker, push to reset.
- No charge indicator light for IC regulator alternator.
- Motor rotation CW or CCW, is reverse trough a power inverter, from 0-6000 RPM in 7 seconds. RPM could be modified as customer request.
- 10 fixed loads. As customer request up to 200 Amps. Switch operated. 20A, 40A, 60A, 80A, 100A, 120A, 140A, 160A , 180A, & 200A.
- Air vise, heavy duty to accommodate any size alternator.
- Heavy-duty metal cabinet with texture finishes.
- Two 10" cooling fans.
- Heavy duty test stand.
- 30 most popular quick connects adapters.
- 7.5 Hp motor 3 Ph. 208-230/460 VAC.
- 7.5 Hp inverter 208-230 OR 460 VAC 3 Ph.
- Dimensions: 40" wide x 58" high x 49" deep.
- Shipping weights 950 lbs.

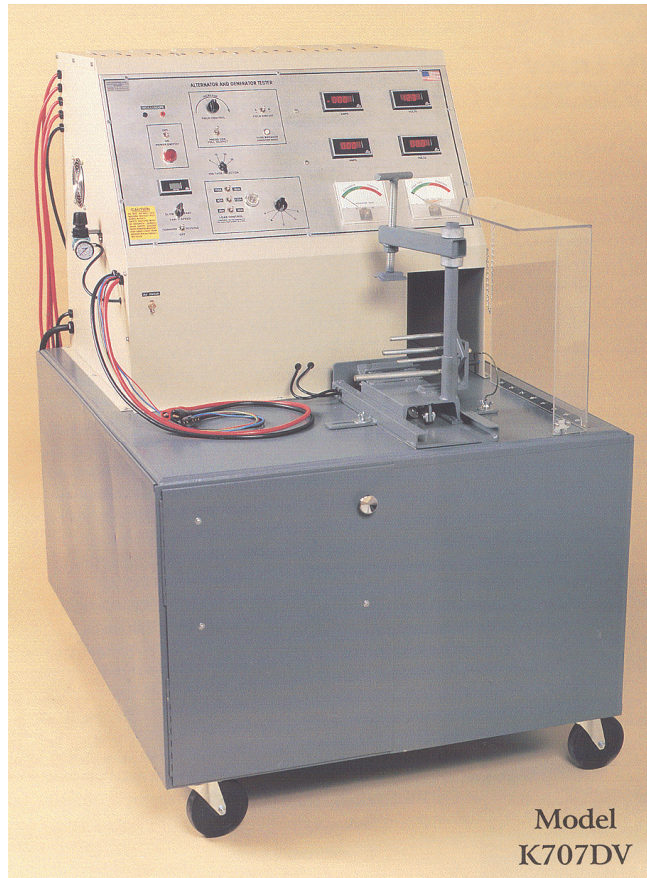

Model  
K707DV